




# High Performance Awning Fabric

## HERCULITE<sup>®</sup> NATURA<sup>™</sup>

**Natura Awning Fabric** is a revolutionary new textile featuring the look and feel of woven cloth on both sides, is completely waterproof, weather-tight and highly fire resistant. This high performance textile is perfect for commercial awnings and canopies designed to protect people and furnishings from the sun's harsh UV rays while providing a natural fabric design element.

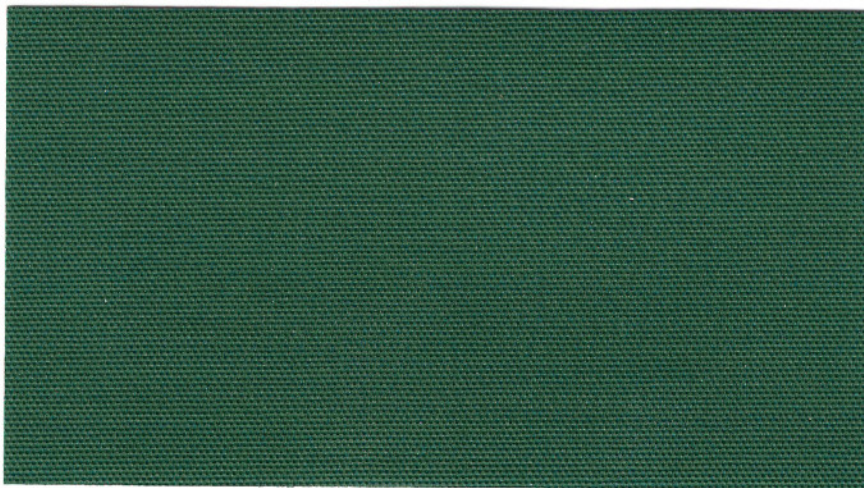

Evergreen NT7711

- Fire Resistant
- Water Proof
- SPF 50+
- Heat & RF Sealable
- Protective Rain-Kleen II Top Coating\*

\* The Top Coated side is the intended face. The underside or "reverse" is indicated by a small **N** within 1/2" of selvage edge.


- Stain & Mildew Resistant
- Dimensionally Stable
- Digitally Printable
- 8 year Warranty
- Made in the USA



Navy Blue NT7747

Cabernet NT7715

Light Grey NT7719

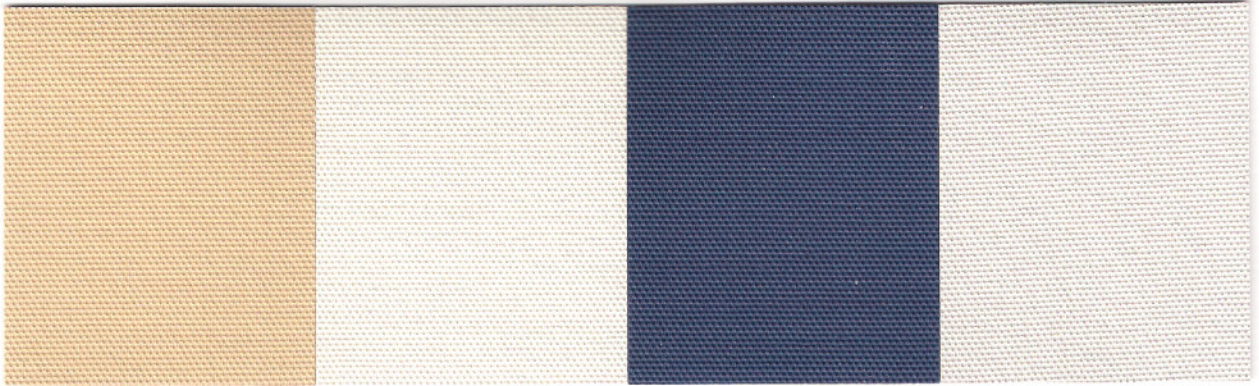


Wheat NT7700

Antique White NT7739

Midnight Blue NT7712

Navajo White NT7797

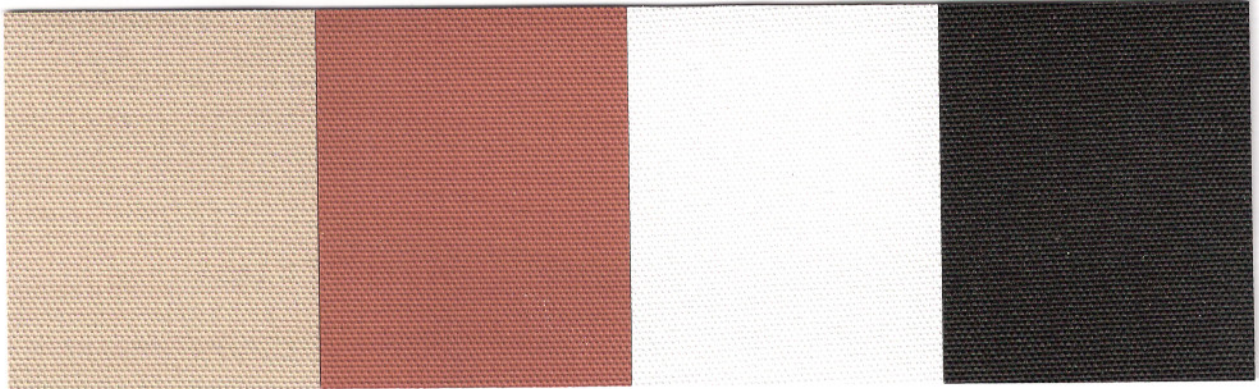


Burlywood NT7738

Barrel Tile NT7709

Digital White NT7788

Pirate Black NT7745

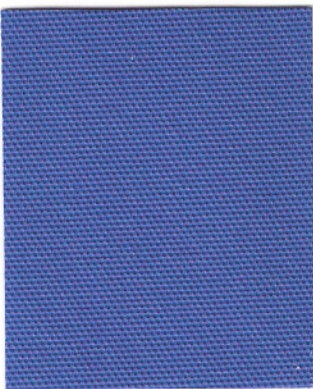

Coastal Blue NT7746

|                        |           |
|------------------------|-----------|
| Abrasion Resistance:   | Excellent |
| Dimensional Stability: | Excellent |
| Flexibility:           | Excellent |
| Mildew Resistance:     | Excellent |
| Chemical Resistance:   | Excellent |
| Water Repellency:      | Excellent |
| Oil Resistance:        | Excellent |
| Sewability:            | Excellent |
| Heat Sealability:      | Excellent |

### Typical Performance Properties (Average)

|                           |                                                 |
|---------------------------|-------------------------------------------------|
| Width                     | 62"                                             |
| Roll Size                 | 50 yd.                                          |
| Weight                    | 18 (oz./sq yd.)                                 |
| Break Strength (lbs./in.) | W 325 F 325                                     |
| Tear Strength (lbs.)      | W 65 F 65                                       |
| Hydrostatic Burst         | 500 PSI                                         |
| Waterproof                | Yes                                             |
| Flame Retardant           | CSFM Title 19, NFPA 701<br>ASTM E84 Class A, M2 |

This information is offered for your general guidance and has been obtained by modern test methods. It is true and accurate to the best of our knowledge at the time of printing.